



SUPERIOR FINISHER
Nissan GT-R/R35
34005-AN001

NOTICE

This manual assumes that you have and know how to use the tools and equipment necessary to safely perform service operations on your vehicle. This manual assumes that you are familiar with typical automotive systems and basic service and repair procedures. Do not attempt to carry out the operations shown in this manual unless these assumptions are correct. Always have access to a factory repair manual. To avoid injury, follow the safety precautions contained in the factory repair manual.

SAFETY PRECAUTIONS

CAUTION

- Do not install onto other inapplicable vehicles. It may cause serious damage to the vehicle and/or accident.
- Do not modify, disassemble, and/or alter the product.
- If any unusual conditions are noticed while driving after installation, consult the dealer immediately. Failure to do so may cause damage to the vehicle or accident.
- Proper maintenance of this product is necessary in order to maintain the safety, reliability, and function of this product.
- If the product is degraded or damaged, replace the product immediately.

ADVICE	Do not use any hard materials and/or polish to clean this product to avoid making scratches on the surface of the product. Use a soft material such as chamois.
---------------	---





- HKS cannot guarantee the safety of this product if it's installed using non-HKS exhaust pipes, since this product may come in contact with other pipes.

WARNING	To prevent a possible accident, follow the installation procedures when installing.
----------------	---

CAUTION	Prior to installation, make sure the engine is shut-off and the exhaust system has cooled down. Failure to do so can lead to severe burns. Also, wear safety glasses while installing.
----------------	--

ADVICE	Prior to installation, wipe off all oil and dirt from the bumper and finisher to avoid any installation issues. It is recommended to have this product install by a professional at an approved facility.
---------------	--


PARTS LIST

NO.	DESCRIPTION	QT	IMAGE	REMARKS
1	Superior Finisher Assembly	1		
2	Mounting Bracket	1		2 Set Screws/ea.
3	Allen Wrench	1		
4	Installation Manual	1		

INSTALLATION PROCEDURE


1. REMOVAL OF FACTORY PARTS

- (1) Remove the plastic clips and tabs. Remove the lower bumper fascia from the main bumper fascia . (Diagram 1)
- (2) Remove the plastic tabs from the bumper finisher. Remove the bumper finisher from the lower bumper fascia . (Diagram 1)

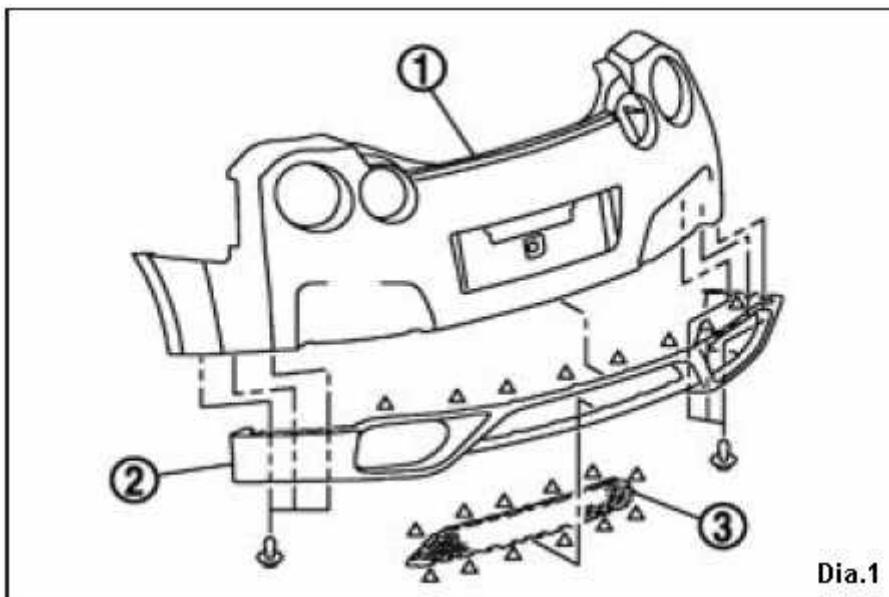


2. INSTALLATION OF KIT PARTS

- (1) Install the Superior Finisher Assembly (P1) from outside the lower bumper fascia. When installing, adjust the position of the Superior Finisher Assembly to the lower bumper fascia fitting. (Diagram 2-1)

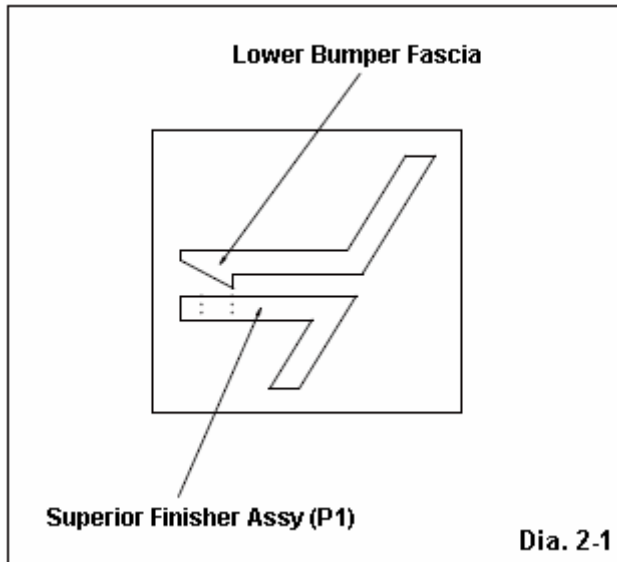

- (2) Temporarily install the Superior Finisher Assembly to the lower bumper fascia using the 4 Installation Brackets (P2) installed on 4 notches of the Superior Finisher. (Diagram 2-2)

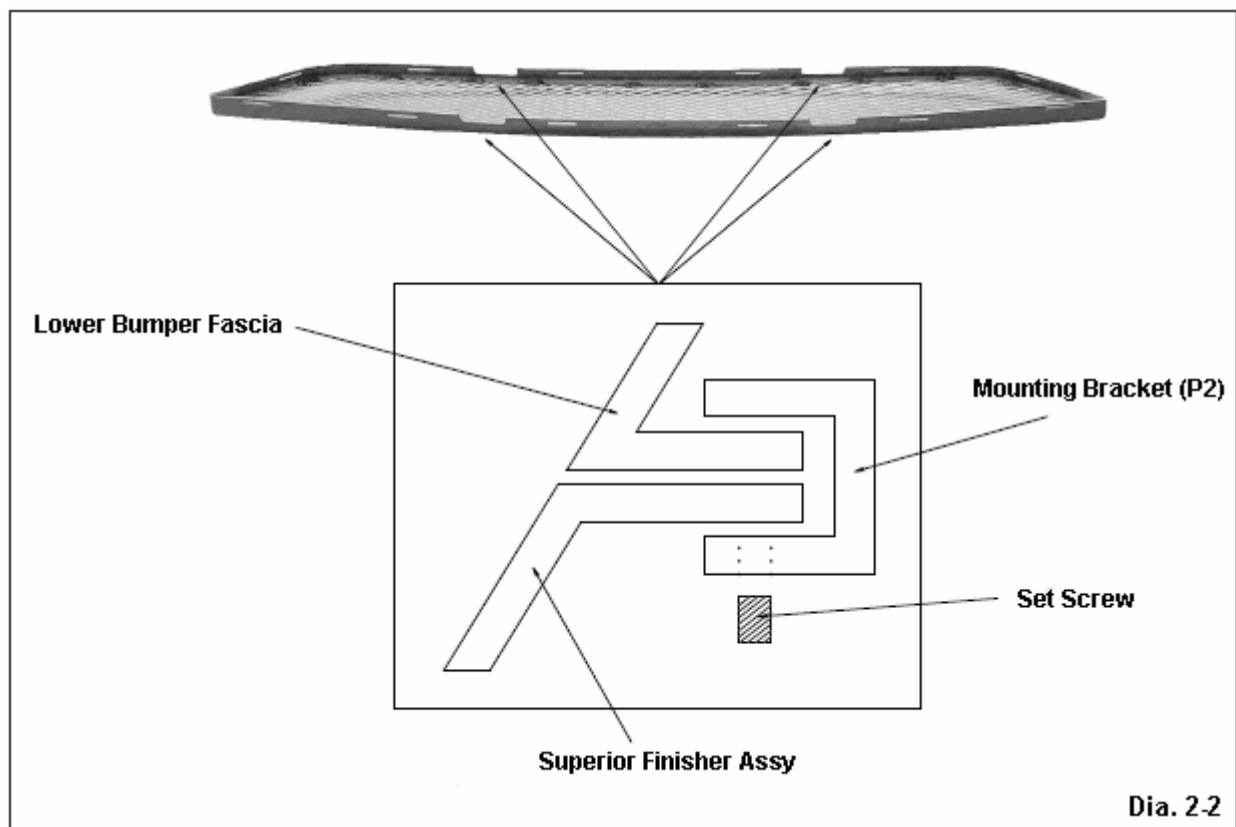

- (3) Pull out the cover film off of the double-sided tape on the Superior Finisher, and press the Superior Finisher to the lower bumper fascia. Tighten all set screws on 4 Installation Brackets using the provided Allen Wrench (P3).

Torque Spec. N-m : $T=3.8\pm 0.5$

ADVICE: Before installing the Superior Finisher to the lower bumper fascia, peel the cover film off of the double-sided tape approximately 3cm, and fold it outward so that the sheet can be pulled out from outside.

- (4) Reinstall the lower bumper fascia in the opposite order of removal.
- (5) Drive the vehicle after making sure all screws are firmly tightened, and the bumper is reinstalled correctly.